

SAFETY INFORMATION

Please read and understand this entire manual before attempting to assemble, install or operate the product.

WARNING

- RISK OF ELECTRIC SHOCK - Before beginning installation, turn off electricity at the circuit breaker box or the main fuse box.
- RISK OF FIRE - Use bulbs specified by the markings and/or labels on the fixture.

CAUTION

- For your safety, read instructions completely before beginning installation.
- If in doubt about electrical installation, consult a licensed electrician.
- Turn off electricity to fixture before replacing the bulb(s).

TOOLS REQUIRED




CARE AND MAINTENANCE


- Wipe clean using soft, dry cloth or static duster. Always avoid using harsh chemicals and abrasives to clean fixture as they may damage the finish.
- When the lamp is repaired, the glass lampshade or decorative part should be removed first.

If you need further assistance call Quoizel Customer Care at 1-800-645-3184 (9:00am - 5:00pm EST), or visit us on-line at www.quoizel.com.

PACKAGE CONTENTS

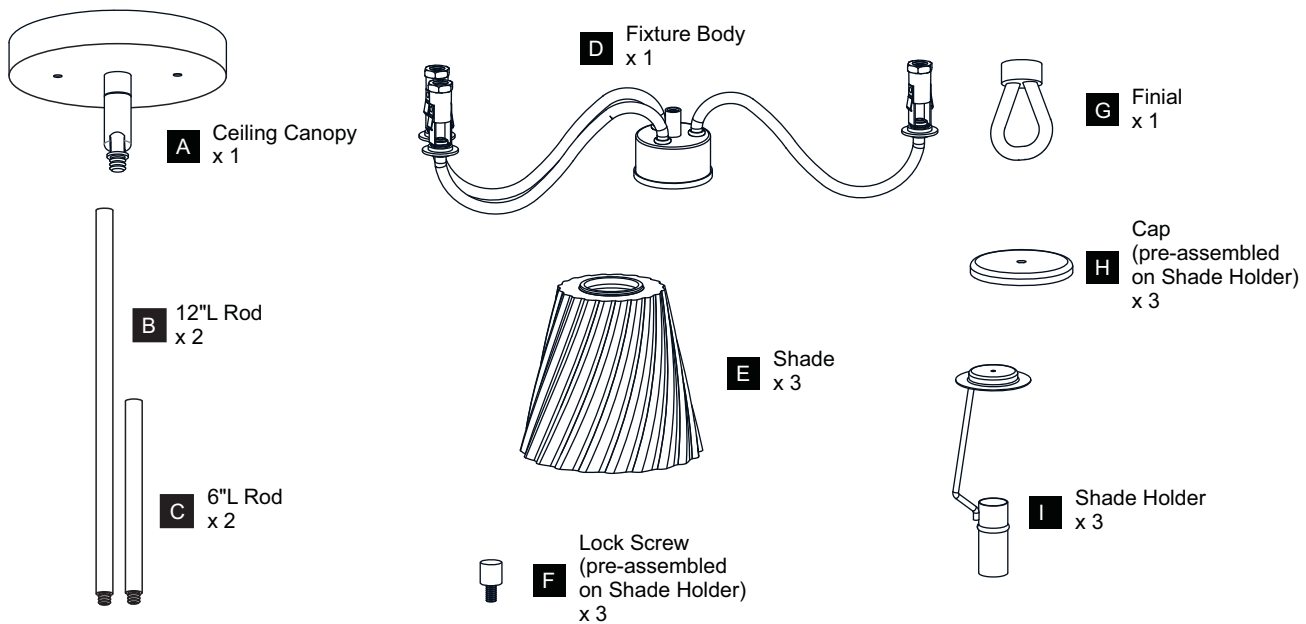

MOUNTING HARDWARE

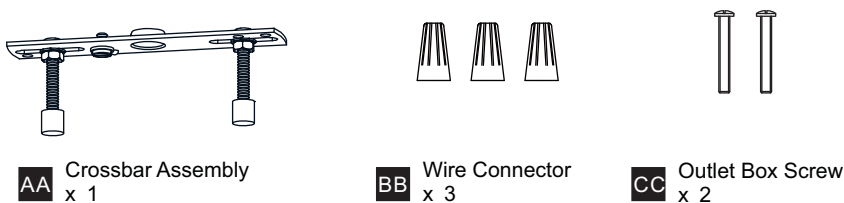

INSTALLATION

OPTION 1: PENDANT MCK5022BN AND MCK5022MBK

1 Unfold Side Arms

2 Install Rods

Optional Rods:

8 Feet Ceiling:
(2) 12"L Rods.
9 Feet Ceiling:
(2) 6"L Rods + (2) 12"L Rods.

3 Tighten hex nut inside of the ceiling canopy

4 Install Ceiling Canopy to Upper Rod

5 Install Crossbar Assembly

Outlet Box

6 Wiring

White wire from supply — White from fixture

Black (or red) wire from supply — Black from fixture

Ground wire from supply — Ground wire from fixture

Green ground screw

7 Install Ceiling Canopy to Crossbar Assembly

90Degree Swivel

For angled ceilings, Swivel opening towards wall.

8 Install Shades and Bulbs

Install three correct bulbs referring to fixture markings and/or labels for maximum wattage.


Recommended Bulb Type (not included):

 BULB BASE TYPE Candelabra (E12)	 BULB SHAPE TYPE B
---	---------------------------------

INSTALLATION

OPTION 2: SEMI-FLUSH MCK1722BN AND MCK1722MBK

* Set aside the (2) 6"L Rods and (1) 12"L Rods since they are not required for the semi-flush installation.



1 Remove Swivel

Set aside swivel

Detailed description: This diagram shows the first step of the installation. It illustrates the removal of the swivel component from the ceiling canopy. The canopy is shown with a swivel attached to its bottom. Arrows indicate the swivel being rotated and then lifted away from the canopy. The text 'Set aside swivel' points to the removed component.

2 Install Ceiling Canopy

Outlet Box

Detailed description: This diagram shows the second step of the installation. It illustrates the ceiling canopy being installed onto the rods. The canopy is shown being lowered onto the rods, and arrows indicate it being pushed down and secured. The text 'Outlet Box' is visible in the background, indicating the location of the electrical outlet box.

3 Install Crossbar Assembly

Outlet Box

Detailed description: This diagram shows the third step of the installation. It illustrates the crossbar assembly being installed onto the rods. The crossbar is shown being lowered onto the rods, and arrows indicate it being pushed down and secured. The text 'Outlet Box' is visible in the background, indicating the location of the electrical outlet box.

4 Wiring

White wire from supply White from fixture
Black (or red) wire from supply Black from fixture
Ground wire from supply Green ground screw
Ground wire from fixture

Detailed description: This diagram shows the wiring connections for the fixture. It illustrates the connection of the supply wires to the fixture wires. The white wire from the supply is connected to the white wire from the fixture. The black (or red) wire from the supply is connected to the black wire from the fixture. The ground wire from the supply is connected to the green ground screw on the fixture. The ground wire from the fixture is also connected to the green ground screw.

5 Install Fixture to Crossbar Assembly

Outlet Box

Detailed description: This diagram shows the fifth step of the installation. It illustrates the fixture being installed onto the crossbar assembly. The fixture is shown being lowered onto the crossbar, and arrows indicate it being pushed down and secured. The text 'Outlet Box' is visible in the background, indicating the location of the electrical outlet box.

6 Install Shades and Bulbs

Install three correct bulbs referring to fixture markings and/or labels for maximum wattage.

Recommended Bulb Type (not included):

BULB BASE TYPE Candelabra (E12)	BULB SHAPE TYPE B

Outlet Box

Detailed description: This diagram shows the sixth step of the installation. It illustrates the installation of the shades and bulbs onto the fixture. The shades are shown being lowered onto the fixture, and arrows indicate they being pushed down and secured. The bulbs are shown being inserted into the fixture. The text 'Outlet Box' is visible in the background, indicating the location of the electrical outlet box.

Your installation is now complete! Restore electricity and save this sheet for future reference.